

Design registration No. 1431989

Dual-structure windscreen minimizes influence of wind noise during wind turbine noise measurements


Dual Windscreen for Wind Turbine Noise Measurement TWS-01

- Compliant with noise meter installation height specifications in "Manual for Measurement of Noise from Wind Power Generation Installations" issued by Ministry of the Environment in 2017
- Used for Ministry of the Environment "Study on evaluation of influence on human impact of low frequency sound from wind power generation installations etc." *1
- Designed for use with High Precision Sound Level Meter NL-62 (with low-frequency measurement function) or High Precision Sound Level Meter NL-52 (Use with General Purpose Sound Level Meter NL-42 also possible)

■ Measurement system for noise from wind power generation installations

*1 Based on research conducted 2010 – 2012 by Prof. Hideki Tachibana
(Professor Emeritus of the University of Tokyo, Research Director Chiba Institute of Technology)

Dual Windscreen for Wind Turbine Noise Measurement TWS-01

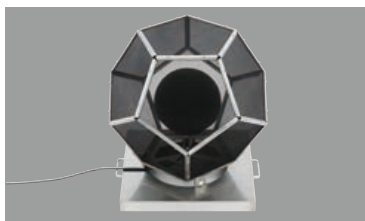

• Tripod mounting also supported

Microphone Extension Cables
EC-04 Series

Class 1 Sound Level Meter
NL-62, NL-52

Octave, 1/3 Octave Real-Time Analysis Program
NX-62RT, NX-42RT

Waveform Recording Program
NX-42WR


Waveform Analysis Software
AS-70

Data Management Software for Environmental Measurement
AS-60




■ Wind speed/wind noise graph for various windscreens

7 cm: Windscreen (WS-10) supplied with sound level meter
20 cm: All-weather windscreen (WS-03, WS-15)

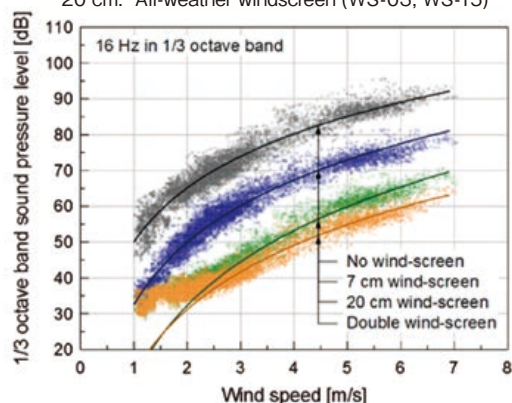

■ Dimensional drawing

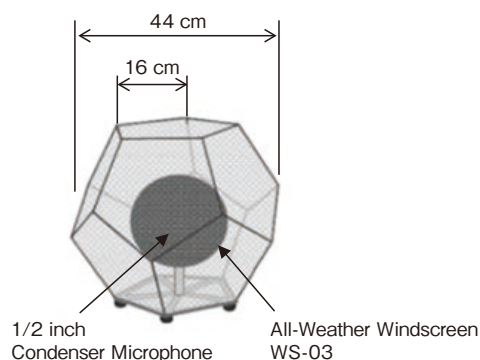

■ Acoustic power level measurement system (JIS C 1400-11*2)

Windscreen KWS-03



Microphone Extension Cables
EC-04 Series

Class 1 Sound Level Meter
NL-62, NL-52

Octave, 1/3 Octave Real-Time Analysis Program
NX-62RT, NX-42RT

Waveform Recording Program
NX-42WR

Waveform Analysis Software
AS-70

Data Management Software for Environmental Measurement
AS-60



*2 Wind power generation systems – Part 11: Measurement method for assessing acoustic radiation characteristics of wind turbines



JCSS
JCSS 0197

RION Co., Ltd. is recognized by the JCSS which uses ISO/IEC 17025 (JIS Q 17025) as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Laboratory Accreditation Cooperation (APLAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality Assurance Section of RION Co., Ltd. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.



ISO 14001 RION CO., LTD.
ISO 9001 RION CO., LTD.

* Specifications subject to change without notice.

Distributed by:

RION CO., LTD.
<https://rion-sv.com/>

3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan
Tel: +81-42-359-7888 Fax: +81-42-359-7442